




TAKING 'MAKE IN INDIA' FORWARD.



KALPAVRIKSHA

UNIVERSAL SOLAR PUMP CONTROLLER



DUST & RAIN PROOF
IP 65 DESIGN



SUPPORTS A VARIETY OF
SOLAR PUMPS



USER FRIENDLY
LCD DISPLAY



AGRARIAN APPLICATION
SUPPORT



SHOCK-PROOF
CONNECTIONS



INTELLIGENT DIGITAL
CONTROL



GPRS ENABLED &
BLUETOOTH CONNECTIVITY



POWERED WITH REMOTE
MONITORING SYSTEM




SHAKTI KALPAVRIKSHA UNIVERSAL SOLAR PUMP CONTROLLER (KUSPC)

ABOUT THE PRODUCT

Kalpavriksha Universal Solar Pump Controller (KUSPC) is a solar converter designed for maximum utilization of solar power available at the site throughout the year. Multiple applications such as Water Pumping, Atta Chakki, Deep Freezer, Thresher etc. can be operated from this single solar powered product. The KUSPC automatically supports the application selected by the user from the graphical display. The product comes with IP65 rating and thus is suitable to be installed in an external environment. All the protection features for various applications are inbuilt. An option to monitor and control the KUSPC remotely using a mobile APP or a website is also available.

TECHNICAL SPECIFICATION

PARAMETERS	KUSPC			
	3 HP	5 HP	7.5 HP	10 HP
PV INPUT				
PV Voltage Range	200 - 770 VDC			
Max. PV Current	13 A		13X2 A	
MPPT Range	220-720 VDC			
Nominal PV Voltage	370 VDC	580 VDC	370 VDC	580 VDC
Number of PV Inputs	1		2	
Max. Power	3000 W	5000 W	7500 W	9000 W
PV Start Voltage	200 VDC			
MOTOR-PUMP OUTPUT				
Voltage range	0 - 500 VAC			
Max. Current	8.5 A		16 A	
Operating Frequency Range	0 - 200 Hz			
Power factor Range	0.75 - 1			
Motor Types	IPMSM, PMSM, ACIM, S4RM			
Peak Efficiency	>92%	>93%	>94%	
Protection	Shortcircuit, Dryrun, Overtemperature, Overload etc			
OTHER APPLICATION OUTPUTS				
Voltage Range	415VAC ± 5%			
Motor Type	ACIM			
Max. Current	5A	8.5 A	10A	16 A
Nominal Frequency	48-50Hz			
Operating Frequency range	0-52 Hz (through Constant V by F)			
Power Factor Range	0.75 - 1			
MPPT Accuracy	>99%			
Max. Efficiency	>92%			
Total Harmonic Distortion (THDv)	<3% (at nominal power)			
Total Harmonic Distortion (THDi)	<5% (at nominal power)			
Protection	Output voltage low, Output frequency low/high, Current overload, Peak Torque overload			
DISPLAY & COMMUNICATION				
Display Type	Graphical LCD			
Status Indicator	LEDs			
Serial Communication	RS232 & RS485			
Aux Ports	MODBUS			
Remote Monitoring	1 Outport, 2 Digital, 2 Analog			
WiFi	Yes (Optional)			
PHYSICAL				
L X W X H	357 x 431 x 263 mm3			
Net Wt. / Gross Wt.	18.5kg/20kg			
OTHER INFO				
Pollution Degree	PD3			
Over Voltage Category	Category II			
Protection Class	Class I			
Operating Temperature	-10 to 50 °C			
Relative Humidity	0~95% RH (Non-condensing)			
Altitude	3000 m (> 2000 m power derating)			
IP Degree of Protection	IP 65 (Indoor & Outdoor Installation)			
Cooling	Air Forced Cooling			
Applicable Standards	IEC61683, IEC60068-2-(1,2,14,30), IEC 60529			

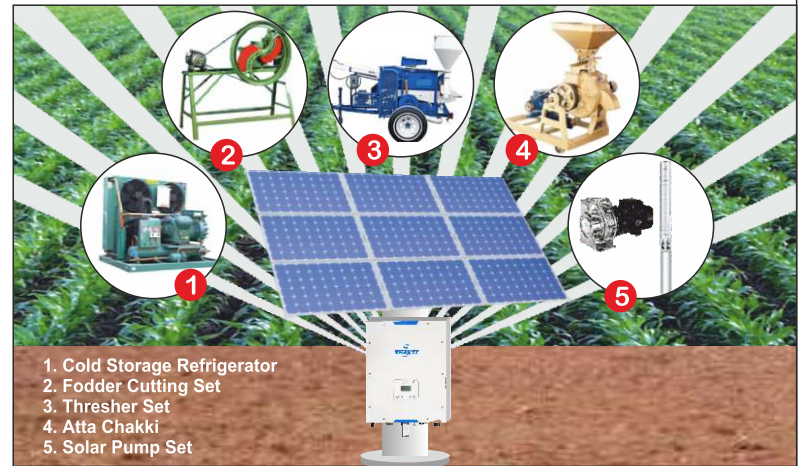

APPLICATION

- Runs various agrarian applications from solar such as pump, thresher, chaff cutter, atta chakki etc.
- It can also be used to operate single phase load.

FEATURES



21 Sept 2023 / R0
Sept./2022-23/12/500
SAP - 2000017657



India : Toll Free No. 1800 103 5555

Other Countries : +91-7292 410500

SHAKTI PUMPS (INDIA) LIMITED

Plot No. 401, 402, & 413, Industrial Area, Sector - 3, Pithampur - 454774,
Dist. - Dhar, (M.P.) - INDIA, E-mail: info@shaktipumps.com, Visit us at : www.shaktipumps.com

Authorised Dealer / Distributor :